

**AUTHORIZATION TO OPERATE AN  
UNDERGROUND INJECTION CONTROL  
(UIC) CLASS 2 INJECTION WELL  
PERMIT NUMBER # UIC 2D03900644002**

**ISSUE DATE: DRAFT**

**EXPIRATION DATE: DRAFT**

In compliance with provisions of the West Virginia Code, Chapter 22, Article 6, Article 11 and Article 12, as well as Legislative Rules, Title 47, Series 9, Series 13, Series 55 and Series 58, and Title 35 Series 1 and Series 4,

**PERMITTEE / OPERATOR**

**NAME:** Base Petroleum, Inc.

**ADDRESS:** 100 Wilcox Farm Lane  
South Charleston, WV 25309

**FACILITY TYPE:** Brine Disposal  
(Non-Commercial)

**WELL API No.:** 47-39-00644

**WELL NAME:** Parsons 1-A

is authorized by this permit to inject Class 2 fluids, that are brought to the surface in connection with conventional oil or natural gas production and may be commingled with waste waters from gas plants which are an integral part of production operations, unless those waters are classified as a hazardous waste at the time of injection, into the Big Lime formation in accordance with the conditions set forth herein. The permitted injection depth shall be 1560 feet to 1690 feet. The injection well is located in the Poca District, Kanawha County, Romance 7.5' Quadrangle. The coordinates for this injection well are: UTM NAD 83 (meters) Northing 4265637.1, Easting 453430.6; Latitude 38.535493, Longitude -81.534326.

The injection well is gravity fed. The maximum permitted wellhead injection pressure is established as 0 psi. Please note that the actual maximum wellhead injection pressure may be adjusted based on the most recent Pre-Operation Certificate (WR-37 Form).

All references to West Virginia regulations are to those that are in effect on the date that this permit becomes effective.

Non-compliance with the terms of this permit shall be cause for revocation of Certification under the terms of Chapter 22, Article 12, and revocation of the permit under Chapter 22, Article 11 of the West Virginia Code.

This permit and its authorization to inject shall remain in effect for five (5) years from the date of issuance of the final permit provided all terms of the permit are met.

James Martin, Chief

Office of Oil and Gas

## **PART I**

### **A. SPECIAL PERMIT CONDITIONS**

- 1. Injectate Samples.** The Permittee shall sample, analyze and record the nature of the injected fluid for the parameters listed in TABLE 1 (Part IV.B.10) on a twelve (12) month schedule so that sampling will be completed at least once per calendar year, or upon request of the Chief, or whenever the Permittee observes or anticipates a change in the injection fluid, to yield representative data on their physical, chemical, or other relevant characteristics. New facilities shall submit a representative sample prior to the initiation of injection operations. The Permittee shall take the sample at or before the wellhead for analysis. Samples and measurements shall be representative of the monitored activity. The Permittee shall utilize applicable analytical methods and test results shall be submitted to the Office of Oil and Gas with complete laboratory analysis data sheets (report). Any analysis of injectate with a specific gravity result greater than 1.2 shall be reported to the Chief within twenty-four (24) hours of the results.

## **PART II**

### **A. FEES**

- 1. Annual Permit Fee.** Any person who holds a permit shall pay an annual permit fee in accordance with the provisions of Legislative Rule 47 CSR 9-7 each year. The annual permit fee for a Class 2 disposal well is twenty-five dollars (\$25).
- 2. Groundwater Protection Fee.** Any person who holds a permit shall pay an annual groundwater protection fee of seventy-five dollars (\$75) each year for each Class 2D injection well in accordance with the provisions of Legislative Rule 47 CSR 55-3.
- 3. Fees Paid in Full Requirement.** The permit becomes void if the annual permit fees have not been paid within one hundred and eighty (180) days of the due date. The Chief shall not reissue a permit until all annual permit fees due during prior terms have been paid in full.

## **PART III**

### **A. REAPPLICATION**

If the Permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the Permittee must submit an administratively complete application, along with application fee payment, for a new permit at least one hundred and eighty (180) days before this permit expires.

## **B. IMMEDIATE REPORTING**

The Permittee shall report any noncompliance which may endanger human health or the environment immediately after becoming aware of the circumstances by using the WVDEP Emergency Spill line number 1-800-642-3074. Written submission shall also be provided within five (5) days of the time the Permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, Permittee shall provide the anticipated time it is expected to continue; and the steps taken or planned to be taken to reduce, eliminate, and prevent reoccurrence of the noncompliance. The following shall be included as information which must be reported immediately:

1. Any monitoring or other information which indicates that any contaminant may cause an endangerment to an underground source of drinking water (USDWs); and
2. Any non-compliance with a permit condition or malfunction of the injection system which may cause fluid migration into or between the USDWs, or failure of mechanical integrity test demonstrations.

## **C. RIGHT OF APPEAL**

Notice is hereby given of your right to appeal the terms and conditions of this permit by which you are aggrieved to the State Environmental Quality Board by filing a NOTICE OF APPEAL on the form prescribed by such Board for this purpose, with the Board, in accordance with the provisions of West Virginia Code, Chapter 22, Article 11, Section 21 (WV Code §22-11-21) within thirty (30) days after the date of issuance of this permit.

## **D. EFFECT OF PERMIT**

The Permittee is allowed to engage in underground injection in accordance with the conditions of this permit based on an approved permit application. The Permittee shall not allow the underground injection activity authorized by this permit to cause or allow the movement of fluid containing any contaminant into underground sources of drinking water and may not cause a violation of any primary drinking water regulation or any health-based limit promulgated under Code of Federal Regulations, Title 40, Chapter I, Subchapter D, Part 142 (40 CFR §142) or of any water quality standard promulgated by the West Virginia Department of Environmental Protection/Division of Water and Waste Management. Any underground injection activity not authorized in this permit is prohibited. Compliance with the terms of this permit does not constitute a defense to any action brought under Part C and the imminent and substantial endangerment provisions in Part D of the Safe Drinking Water Act (SDWA) or any other common or statutory law for a breach of another applicable legal duty.

## **E. PERMIT ACTIONS**

- 1. Permit Status Change.** This permit can be modified, revoked and reissued or terminated for cause specified in West Virginia Code, Chapter 22, Article 11 (WV Code §22-11), and Chapter 22, Article 12 (WV Code §22-12), and Legislative Rule 47 CSR 13. The filing of a request by the Permittee for a permit modification, revocation and reissuance, suspension or revocation, or notification of planned changes or anticipated noncompliance, does not stay any permit condition.
- 2. Transfer of Permits.** This permit is not transferable to any person unless notice is first provided to the Office of Oil and Gas and the Permittee complies with requirements of Legislative Rule 47 CSR 13-13.17. The Office of Oil and Gas may require modification or revocation and reissuance of the permit to change the name of the Permittee and incorporate such other requirements as may be necessary under the SDWA.

## **F. SEVERABILITY**

The provisions of this permit are severable, and if any condition of this permit or the Permittee's application of any provision of this permit to any person or circumstance is held invalid, such invalidity shall not affect other provisions or applications of other provisions of the permit and the remainder of this permit shall not be affected.

## **G. DURATION OF PERMIT**

This permit and the authorization to inject are issued for a period of five (5) years unless terminated under Part III.E.1 of this permit. However, when through no fault of the Permittee the Office of Oil and Gas does not issue a new permit with an effective date on or before the expiration date of the previous permit and the Permittee has submitted a timely administratively complete application as required in Part III.A of this permit, which is a complete application for a new permit, the expired permit shall continue to remain fully effective and enforceable.

## **H. GENERAL REQUIREMENTS**

- 1. Duty to Comply.** The Permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the SDWA and the State Act and is grounds for enforcement action; for permit suspension or revocation, revocation and reissuance, or modification; or for denial of a permit renewal application. (Legislative Rule 47 CSR 13-13.12.a) Copies of UIC Program regulations (WV Code §22-11) may be obtained from the West Virginia Legislature's Website <http://www.legis.state.wv.us/WVCODE/Code.cfm>, and (Legislative Rule 47 CSR 13) may be obtained from the West Virginia Secretary of State's Website at <http://www.sos.wv.gov/>.

2. **Duty to Reapply.** If the Permittee wishes to continue activity regulated by this permit after the expiration date of this permit, the Permittee must apply for and obtain a new permit as required in Part III.A of this permit at least one hundred and eighty (180) days before this permit expires.
3. **Duty to Halt or Reduce Activity Not a Defense.** It shall not be a defense for a Permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.
4. **Duty to Mitigate.** The Permittee shall take all reasonable steps to minimize or correct any adverse impact on health of persons or the environment resulting from noncompliance with this permit.
5. **Proper Operation and Maintenance.** The Permittee shall at all times properly operate and maintain all facilities, systems of treatment and control, and related equipment which are installed or used by the Permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance include effective performance, adequate funding, adequate operating staffing and training, adequate security at the facility to prevent unauthorized access, adequate laboratory, and process controls, including appropriate quality assurance procedures. This provision requires the operation of backup or auxiliary facility or similar systems only when necessary to achieve compliance with the conditions of this permit.
6. **Duty to Provide Information.** The Permittee shall furnish to the Chief within a reasonable time, any information which the Chief may request to determine whether cause exists for modifying, revoking and reissuing, or revoking this permit, or to determine compliance with this permit. The Permittee shall also furnish to the Chief, upon request, copies of records required to be kept by this permit. If the Permittee becomes aware of any incomplete or incorrect information in the permit application or subsequent report(s), the Permittee shall promptly submit information addressing these deficiencies to the Chief.
7. **Inspection and Entry.** The Permittee shall allow the Chief, or an authorized representative, upon the presentation of credentials and other documents as may be required by law to:
  - a. Enter upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
  - b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
  - c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and

**d.** Sample or monitor, at reasonable times, for the purposes of assuring permit compliance for any substances or parameters at any location.

**8. Penalties.** Any person who violates a permit requirement is subject to civil penalties, criminal penalties, fines, and other enforcement actions under WV Code §22-11 and WV Code §22-12.

**9. Signatory Requirements.** Only a duly authorized person may sign documents and reports associated with this permit.

**a.** All reports required by this permit and other information requested by the Chief shall be signed as follows:

- i.** For a corporation, by a responsible corporate officer of at least the level of vice-president;
- ii.** For a partnership or sole proprietorship, by a general partner or the proprietor, respectively; or
- iii.** For a Municipality, State, Federal, or other public agency by either a principal executive or a ranking elected official.

**b.** A duly authorized representative of the official designated in paragraph a. above may also sign only if:

- i.** The authorization is made in writing by a person described in paragraph a. above;
- ii.** The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity; and
- iii.** The written authorization is submitted to, and approved by, the Chief

**c.** If an authorization under paragraph (b) of this section is no longer accurate because a different individual has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph (b) of this section must be submitted to the Chief prior to or together with any reports, information or applications to be signed by an authorized representative.

**d.** Any person signing a document under paragraph (b) of this section shall make the following certification: (Legislative Rule 47 CSR 13-13.11.d). "I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment."

- 10. Property Rights.** Issuance of this permit does not convey property rights or mineral rights of any sort or any exclusive privilege; nor does it authorize any injury to persons or property, any invasion of other private rights, any infringement of Federal, State or local law or regulations, or any exclusive privilege.
- 11. Permit Actions.** This permit may be modified, revoked and reissued, suspended, or revoked for cause. The filing of a request by the Permittee for a permit modification, revocation and reissuance, suspension or revocation, or notification of planned changes or anticipated noncompliance, does not stay any permit condition.
- 12. Confidentiality of Information.** In accordance with Legislative Rule 47 CSR 13-13.21, any information submitted to the State pursuant to this rule may be claimed as confidential by the submitter. Any such claim must be asserted at the time of submission in the manner prescribed on the application form or instructions, or in the case of other submissions, by stamping the words "CONFIDENTIAL BUSINESS INFORMATION" on each page containing such information. An affidavit or written request stating the need for requested confidential documents to remain confidential must also be submitted with the documents.
- a. If no claim is made at the time of submission, the State may make the information available to the public without further notice.
  - b. Claims of confidentiality for the following information will be denied:
    - i. The name and address of any permit applicant or Permittee; or
    - ii. Information which deals with the existence, absence, or level of contaminants in drinking water.
- 13. Monitoring Reports.** Monitoring results shall be reported at the intervals specified under Part IV.B of this permit.
- 14. Compliance Schedules.** Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than thirty (30) days following each schedule date.
- 15. Other Information.** Where a Permittee becomes aware that he/she failed to submit any relevant facts in a permit application or submitted incorrect information in a permit application or in any report to the Chief, he/she shall promptly submit such facts or information.
- 16. Prohibited Activity.** It shall be unlawful for any person, unless an authorization has been issued by a groundwater regulatory agency, to allow crude oil, or any petroleum product derived from crude oil, or seepage, or natural gas, or condensate, or salt water, or any chemical mixture which may impact groundwater quality to escape from any well, pump line, impoundment, storage tank, treatment unit, or storage container, or be allowed to flow onto or under the land surface or in such a manner that could impact surface or groundwater quality.

- 17. State or Federal Laws.** Nothing in this permit shall be construed to preclude the institution on any legal action or relieve the Permittee from any responsibilities, liabilities, or penalties established pursuant to any State or Federal law or regulation.

## **PART IV**

### **A. RECORD RETENTION**

- 1. Required Records.** The Permittee shall retain all records concerning the permitted underground injection well until three (3) years after completion of any plugging and abandonment. The Chief may require the Permittee/Operator to deliver the records to the Chief at the conclusion of the retention period.

### **B. MONITORING REQUIREMENTS**

- 1. Sampling and Measurement.** Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity. The method used to obtain a representative sample of the fluid to be analyzed and the procedure for analysis of the sample shall be in accordance with test procedures approved under 40 CFR §136.3, unless otherwise approved by the Chief. The Permittee shall identify the types of tests and methods used to generate the monitoring data.
- 2. Monitoring Devices.** The Permittee shall install and maintain in good operating condition:
- a.** A method or mechanism on the injection line(s) for obtaining a representative sample of injection fluids;
  - b.** Devices to continuously measure and record injection pressure, flow rates, injection and production volumes;
  - c.** Pressure gauges shall be of a design that provides a full pressure range of at least fifty (50) percent (%) greater than the anticipated operating pressure and a certified deviation accuracy of five (5) percent (%) or less throughout the operating pressure range; and
  - d.** Flow meters shall measure cumulative volumes and be certified for a deviation accuracy of five (5) percent (%) or less throughout the range of rates allowed by the permit.
- 3. Wellhead Pressure Gauge.** A wellhead pressure gauge shall be installed and maintained on the injection tubing to facilitate inspection and ensure compliance of the maximum wellhead injection pressures as approved on Office of Oil and Gas WR-37 Form. A daily reading of the maximum wellhead injection pressure shall be taken and reported on WR-40 Form.

**4. Daily Monitoring.** The Permittee shall daily monitor all the casing annuli with pressure sensitive devices or with such a method as approved or required by the Office of Oil and Gas to allow early detection of any leaks from the packer, injection zone or casing. The Permittee shall also monitor the daily maximum injection pressure, volume, and rate daily. This information shall be reported monthly using the Office of Oil and Gas electronic WR-40 Form. Submittal shall be through the WVDEP Electronic Submittal System (ESS): <https://apps.dep.wv.gov/eplogin.cfm>.

**5. Monitoring Records.** Records of monitoring information shall include:

- a. The date, exact place, and time of sampling or measurements;
- b. The individual(s) who performed the sampling or measurements;
- c. The date(s) analysis(es) were performed;
- d. Individual(s) who performed the analyses;
- e. The analytical techniques or methods used; and
- f. The results of such analyses.

**6. Injection Well Mechanical Integrity Testing (MIT).** The Permittee shall conduct a mechanical integrity test of the injection well at a minimum frequency of once every five (5) years per Legislative Rule 35 CSR 4-7.7.b. The Permittee shall notify the Chief of his or her intent to conduct a mechanical integrity test of the well no less than twenty-four (24) hours prior to such test. This facility is permitted as a gravity fed well with no mechanical pumping system. The pressure requirement of a mechanical integrity test on a gravity fed well is a pressure of at least two hundred (200) pounds per square inch (psi) on the annulus between the injection tubing and the production casing. The pressure must be held for a period of at least twenty (20) minutes with no more than five (5) percent (%) pressure loss to be approved for injection operations. The Permittee must submit a WR-37 Form with the pressure recording graph/chart as an attachment to the Office of Oil and Gas within thirty (30) days of each mechanical integrity test conducted. Upon failure of a mechanical integrity test or expiration of the five (5) year mechanical integrity test regulatory period, the Permittee shall cease operation/injection and shut-in the well immediately until successfully repaired, tested or permanently plugged and abandoned per regulation. Any MIT test that fails must be documented on a separate WR-37 Form. All repairs shall be completed by the Permittee within ninety (90) days of the failure date and approved by the Office of Oil and Gas prior to resuming operations. If repaired, the well must be re-tested and an updated WR-37 Form with pressure recording graph/chart must be submitted to the Office of Oil and Gas for approval.

- 7. Pump Line Mechanical Integrity Testing (MIT).** The Permittee shall conduct a mechanical integrity test of all injection pipeline(s) from the holding tanks to the injection well at a minimum frequency of once every five (5) years. The Operator has the option of testing the injection pipeline(s) simultaneously with well or separately. The Permittee shall notify the Chief of his or her intent to conduct a mechanical integrity test of the injection pipeline(s) no less than twenty-four (24) hours prior to such test. The injection pipeline(s) integrity test shall pressurize the injection pipeline(s) to at least one hundred (100) psi greater than the maximum permitted wellhead injection pressure for a minimum of twenty (20) minutes, allowing for no more than five (5) percent (%) loss after completion. The Permittee must submit a WR-37 Form with the pressure test recording graph/chart as an attachment to the Office of Oil and Gas within thirty (30) days of each mechanical integrity test conducted. Upon failure of a mechanical integrity test or expiration of the five (5) year mechanical integrity test regulatory period, the Permittee shall cease operation/injection and shut-in the well immediately until successfully repaired or replaced and then tested. Any MIT test that fails must be documented on a separate WR-37 Form. All repairs shall be completed by the Permittee within ninety (90) days of the failure date and approved by the Office of Oil and Gas prior to resuming operations. If repaired, the line must be re-tested and an updated WR-37 Form with pressure recording graph/chart must be submitted to the Office of Oil and Gas for approval. Any change made to the pump line fittings or piping will require integrity pressure testing. All Office of Oil and Gas forms, including the WR-37 Form can be found on the Office of Oil and Gas webpage: <http://www.dep.wv.gov/oil-and-gas/GUForms/Pages/default.aspx>.
- 8. Additional MIT Requirements.** In addition to the above requirement, a mechanical integrity test demonstration shall be conducted whenever protective casing or tubing is removed from the well, the packer is replaced or resealed, if a well failure is likely, or as requested by the Chief. The Permittee may continue operation only if they have successfully demonstrated to the Chief the mechanical integrity of the permitted well. The Permittee shall cease injection operations if a loss of mechanical integrity becomes evident or if mechanical integrity cannot be demonstrated. The Permittee must submit a written notification to Office of Oil and Gas within twenty-four (24) hours if mechanical integrity of the well is lost. The notification must include a plan to repair and retest of the well within ninety (90) days of the failure date.
- 9. Environmental Measurements.** All environmental measurements required by the permit, including but not limited to, measurements of pressure, temperature, mechanical, and chemical analyses shall be done in accordance with state guidance on quality assurance. All analysis must be performed by a West Virginia certified laboratory. Certified laboratories can be found on the WVDEP webpage at <http://www.dep.wv.gov/WVE/Programs/lab/Pages/default.aspx>.

- 10. Injectate Samples.** The Permittee shall sample, analyze and record the nature of the injected fluid for the parameters listed in TABLE 1 on a twelve (12) month schedule so that sampling will be completed at least once per calendar year, or upon request of the Chief, or whenever the Permittee observes or anticipates a change in the injection fluid, to yield representative data on their physical, chemical, or other relevant characteristics. New facilities shall submit a representative sample prior to the initiation of injection operations. The Permittee shall take the sample at or before the wellhead for analysis. Samples and measurements shall be representative of the monitored activity. The Permittee shall utilize applicable analytical methods and test results shall be submitted to the Office of Oil and Gas with complete laboratory analysis data sheets (report). Any analysis of injectate with a specific gravity result greater than 1.2 shall be reported to the Chief within twenty-four (24) hours of the results.

**TABLE 1**

Aluminum	Iron	pH
Arsenic	Manganese	Specific Gravity
Barium	Sodium	Total Dissolved Solids (TDS)
Bromide	Strontium	
Calcium	Sulfate	Radium-226 and Radium 228
Chloride		Gross Alpha and Gross Beta

## **C. REPORTING AND NOTIFICATION REQUIREMENTS**

- 1. Anticipated Noncompliance.** The Permittee shall give advance notice to the Chief of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements.
- 2. Other Noncompliance.** The Permittee shall report all instances of noncompliance not reported under paragraphs Part III.B.1 and 2, and Part IV.C.1 of this permit, at the time monitoring reports are submitted. The report shall contain the information listed in Part III.B of this permit. The Permittee shall report all other instances of noncompliance in writing within ten (10) days of the time the Permittee becomes aware of the circumstances. The reports shall contain the information listed in this permit.
- 3. Planned Changes.** The Permittee shall give notice to the Chief as soon as possible of any planned physical alterations, additions to the permitted facility, and/or any changes planned in the operation of the facility.
- 4. Conversion and Abandonment Notification.** The Operator shall provide written notification to the Chief prior to conversion or abandonment of the well or in the case of area/enhanced recovery permits before closure of the project, per Legislative Rule 47 CSR 13-13.6.e. Notice should be given at least thirty (30) days prior to any conversion, abandonment or alteration. Notice shall also be given prior to the addition, reduction, or conversion of wells within an area/enhanced recovery permit.

5. **Cessation of Injection Activity.** Any well which is not in use for a period of twelve (12) consecutive months shall be presumed to have been abandoned and shall promptly be plugged by the Operator in accordance with the provisions in West Virginia Code, Chapter 22, Article 6, Section 24 (WV Code §22-6-24) unless the Operator furnishes satisfactory proof to the Chief that there is a bona fide future use for such well. All lines shall be completely drained of all fluids and the wellhead shut-in anytime injection operations cease for a period of greater than ninety (90) days. The Office of Oil and Gas must be contacted at least twenty-four (24) hours prior to the cessation shut-in process.
6. **Certification of Permit Review.** Within thirty (30) days of receipt of this permit, the Permittee shall report to the Chief that he or she has read and understands and accepts all terms and conditions of the permit. The Certification Document is included as an attachment of this permit, and must be signed, dated and submitted to Office of Oil and Gas.
7. **Duty of Owner/Operator to Report Discharges.** The Owner or Operator or person in charge of a facility subject to this rule (from which a reportable discharge, as described in Legislative Rule 35 CSR 1-3.3, occurs shall notify the Office of Oil and Gas by calling **1-800-642-3074** immediately; but in no case, later than twenty-four (24) hours after becoming aware of the discharge.

## **PART V**

### **A. OPERATING REQUIREMENTS**

1. **Permit Documents On-Site.** The UIC Permit and all attachments must be kept on location at all times.
2. **Non-Commercial Permits.** The facility is permitted as a Non-Commercial operation and can only accept Class 2 fluids from wells owned by the Permittee of the injection well. The Office of Oil and Gas will allow the Permittee to amend the designated well list upon request pending verification of well ownership.
3. **Authorized Injection Fluids.** The Permittee shall not inject any hazardous substances, as defined by 40 CFR §261, or any other fluid, other than the Class 2 fluids produced solely in association with oil and gas production operations. This permit is for authorization of injection of only fluids as defined for Class 2 wells in Legislative Rule 47 CSR 13-4.2. Accepting any fluid that is not Class 2 compliant is grounds for enforcement action and/or revocation of this permit.
4. **Annulus Injection Prohibited.** Injection between the outermost casing protecting underground sources of drinking water and the wellbore is prohibited, as is injection into any USDW.
5. **Required Barrel Counter.** The Permittee shall install and maintain a barrel counter, or other means of flow volume metering, on the injection line. The results are to be recorded and reported on the WR-40 Form.

- 6. Manifest Records.** The Permittee shall maintain a record (manifest) of every load of fluid received. The record shall include the hauler's name and signature, the Operator's name and signature, API number for the well the fluid was collected, the location from where the load was obtained and the volume of the load and whether the load of fluid delivered was a split load. If the load was a split load, each Operator's name and location shall be listed and, if possible, the volumes of fluid received from each Operator documented. This information shall be maintained on the OOG approved Class 2 disposal manifest form example, as attached to this permit.
- 7. Contract Haulers.** No hauler whose trucks do not belong to the UIC Operator shall be permitted without approval by the Office of Oil and Gas. For approval, the Permittee shall designate by letter to the Office of Oil and Gas, any third-party hauler proposed to be used for the transportation of fluids to the facility. The third-party hauler may not commence transportation of fluids to the facility until approved by the Office of Oil and Gas. All delivery manifest requirements must still be met.
- 8. Duty to Monitor or Plug Non-Cemented Wells That Penetrates the Injection Zone Within the AOR.** Any well with an inactive and/or abandoned status that penetrates the injection zone within the permitted Area of Review (AOR), that does not have cemented casing through the injection zone, shall be monitored immediately by a method approved by the Office of Oil and Gas or properly plug such wells as necessary.
- 9. Corrective Action.** The applicant must satisfy the requirements of the Office of Oil and Gas regarding any corrective action needed on all known wells penetrating the injection zone within the permitted AOR. This must be done in a manner which satisfies the requirements of Legislative Rule 47 CSR 13-13.9.
- 10. Cement Evaluation Analysis.** After conducting a cement squeeze job in an open hole, or after any well cement repair, the Permittee shall submit cementing records and cement evaluation logs that demonstrate the isolation of the injection interval(s). The analysis shall include a spherically focused tool, run after the long-string casing is set and cemented, which enables the evaluation of the bond between cement and casing as well as of the bond between cement and formation. A written narrative report summarizing the work and interpretation of the results shall be submitted with all available records including an updated WR-35 well record and updated well schematic. The Permittee may not commence or recommence injection until it has received written approval from the Office of Oil and Gas that such a demonstration is satisfactory.
- 11. Loading/Unloading Stations.** Loading and unloading stations shall have spill prevention and control facilities and procedures as well as secondary containment. Spill containment and cleanup equipment shall be readily accessible.

## **12. Above Ground Storage Tanks.**

- a.** The Permittee shall ensure that secondary containment for existing above ground storage tank(s) shall be adequately designed and constructed to be sufficiently impervious to prevent the released substance from penetrating the containment structure until the release can be detected and recovered, but in no case, shall that time be less than seventy-two (72) hours. The secondary containment structure shall have capacity to contain at least one hundred and ten (110) percent (%) volume of the largest tank. If tank batteries or tanks are connected in series by manifold, the combined volume of the tanks must be considered if the tanks are capable of simultaneous release. The combined capacity of the tanks connected by manifold shall be considered unless the tanks are operated in a manner that prevents fluids from flowing from one tank to another under any conditions.
- b.** Above ground tanks connected in series by a manifold shall utilize a system where valves are closed and locked to isolate tanks when their combined volume exceeds the secondary containment capacity. At no time, shall the combined volume of the tanks be accessible through the manifold system exceed the capacity of the secondary containment without someone being on site to monitor.
- c.** All above ground storage tanks within the floodplain, as defined by the Federal Emergency Management Agency "FEMA" 100-year floodplain map, shall be anchored significantly enough to prevent movement in the case of a high-water flood event. The Permittee should contact the county floodplain manager to confirm the floodplain status of the tank(s) location(s).

**13. Wellhead Reinforcement.** All wellheads shall be reinforced or otherwise armored to protect against accidental collisions, if so positioned where collision could be possible.

**14. Pumps and Ancillary Equipment.** Pumps and ancillary equipment (e.g. valves, flanges, filters, condensate lines and instrumentation) handling materials that have the potential to contaminate groundwater shall be selected and installed to prevent or contain any spills or leaks.

**15. Sumps.** Sumps containing materials which have the potential to contaminate groundwater shall be designed, constructed and operated utilizing secondary containment, or other appropriate controls that can prevent groundwater contamination.

**16. Facility Security.** All valves, water drains, containment areas, and storage areas shall be secured and locked utilizing locking devices and/or plugs. All gates and access points shall be secured and locked while no representative is at the facility.

**17. Duty to Drain Injection Pump Lines.** All lines shall be completely drained of all fluids and the wellhead shut-in anytime injection operations cease for a period of greater than ninety (90) days. The Office of Oil and Gas must be contacted at least twenty-four (24) hours prior to the cessation shut-in process.

## **B. PLUGGING AND ABANDONMENT**

1. Any well which is not in use for a period of twelve (12) consecutive months shall be presumed to have been abandoned and shall promptly be plugged by the Operator in accordance with the provisions of WV Code §22-6, unless the Operator furnishes satisfactory proof to the Chief that there is a bona fide future use for such well.
2. Plugging and abandonment shall be conducted in a manner to prevent movement of fluids into or between USDWs (underground sources of drinking water).
3. Pursuant to Legislative Rule 47 CSR 13-13.7.f, the Permittee's plugging and abandonment plan shall be incorporated into the UIC permit. See Attachment 1.
4. Prior to well plugging, the Permittee shall apply for and receive a plugging permit from the Office of Oil and Gas to plug and abandon the well in accordance with an approved plugging and abandonment plan.

## **PART VI**

### **A. SITE SPECIFIC CONDITIONS**

1. Appendix A: Specific Operational Conditions / Well Construction
2. Appendix **H**: Groundwater Protection Plan (GPP)
3. Appendix I: Requirement for Financial Responsibility to plug/abandon an injection well
4. Attachment 1: Plugging and Abandonment Plan
5. Attachment 2: Site/Facility Diagram
6. Class 2 Manifest
7. Right of Appeal
8. UIC Certification of Review



47-039-00644

**APPENDIX A (cont.)**RECEIVED  
Office of Oil and Gas

SEP 20 2022

WV Department of  
Environmental Protection**12. Casing and Tubing Program**


<b>TYPE</b>	<b>Size</b>	<b>New or Used</b>	<b>Grade</b>	<b>Weight per ft. (lb/ft)</b>	<b>FOOTAGE: For Drilling</b>	<b>INTERVALS: Left in Well</b>	<b>CEMENT: Fill-up (Cu. Ft.)</b>
Conductor							
Fresh Water							
Coal							
Intermediate 1							
Intermediate 2							
Production	8.625			25.5	1584	1584	956' fill up
Tubing	2.375		J-55	4.6		1625	
Liners							

<b>TYPE</b>	<b>Wellbore Diameter</b>	<b>Casing Size</b>	<b>Wall Thickness</b>	<b>Burst Pressure</b>	<b>Cement Type</b>	<b>Cement Yield (cu. ft./sk)</b>	<b>Cement to Surface ? (Y or N)</b>
Conductor							
Fresh Water							
Coal							
Intermediate 1							
Intermediate 2							
Production							
Tubing							
Liners							

<b>PACKERS</b>	<b>Packer #1</b>	<b>Packer #2</b>	<b>Packer #3</b>	<b>Packer #4</b>
Kind:	Tension			
Sizes:	2.375 X 8.625			
Depths Set:	1534			

RECEIVED  
Office of Oil and Gas  
SEP 20 2022  
WV Department of  
Environmental Protection

PARSONS A-1  
47-039-0644

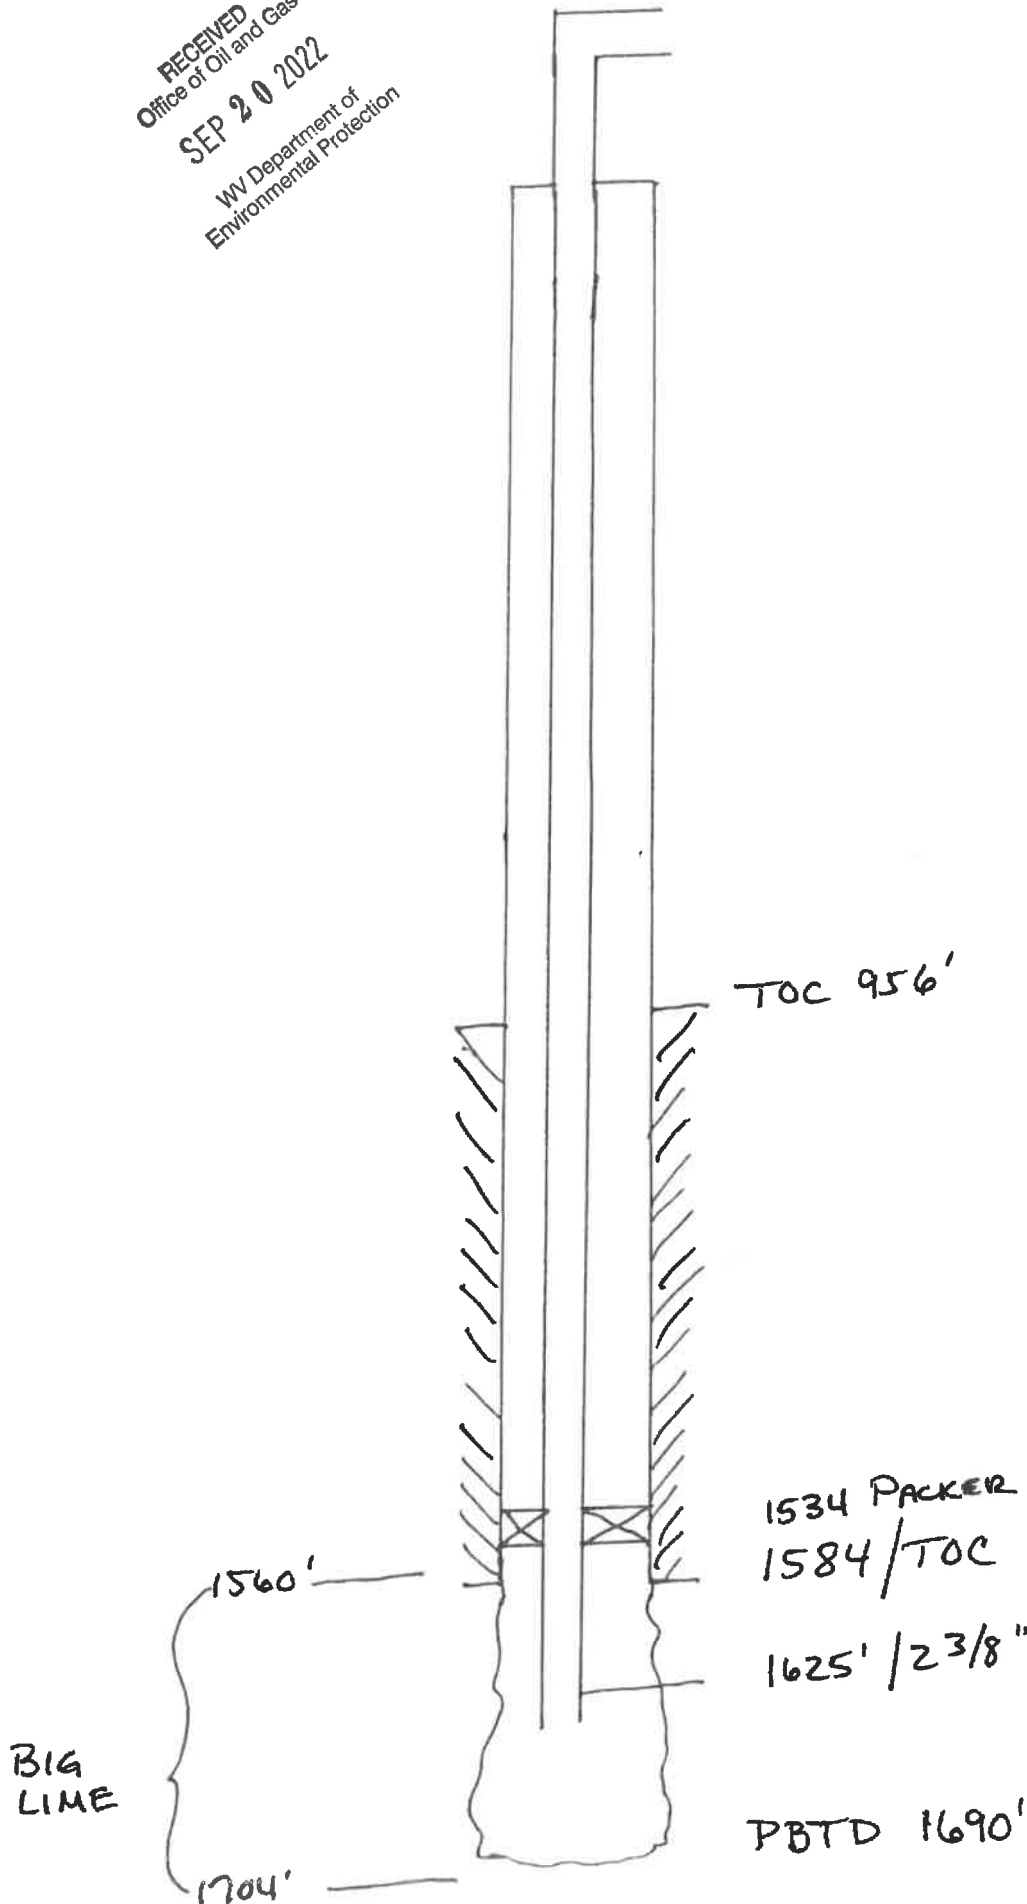

TOC 956'

1534 PACKER

1584 / TOC 956' / 8 5/8"

1625' / 2 3/8" TUBING

PBTD 1690'

BIG  
LIME

EXISTING WELL SCHEMATIC  
WELL DATA SHEET

WELL NAME Parson A #1 GW # 430 DATE / /  
FIELD Culb. 665 CNTY Kanawha ST WV  
PERMIT NO. KAN-644 LEASE NO.   
COMPL DATE 3/30/97 TO 5092 PBTD 1690 ELEV 851.4  
WORKING INTEREST  NET INTEREST

FORMATION	TOP	BTM	DATUM	DATE	O.F. MCFD	HRS.
Big Line	1560	1704		/ /		
Big Line	1704	1731		/ /		
Beaver	2135	2137		/ /		
Oriskany	5018	5089		/ /		

CASING PROGRAM


SIZE	WGT	GRADE	DEPTH	CEMENT	TOC
19"	42#		43		
10 3/4"			407	Pulled	
8 3/8"	25.55		1584	29555 Aqua Cmt. 151 Aquagel	956

TUBING


SIZE	WGT	GRADE	DEPTH	RODS SIZE	WGT	GRADE	DEPTH
2 7/8"	4.7"	J-55 EUC	1534				

DOWN HOLE PROD EQUIP  
#2 1534

Yumaco Hookwall compression pack

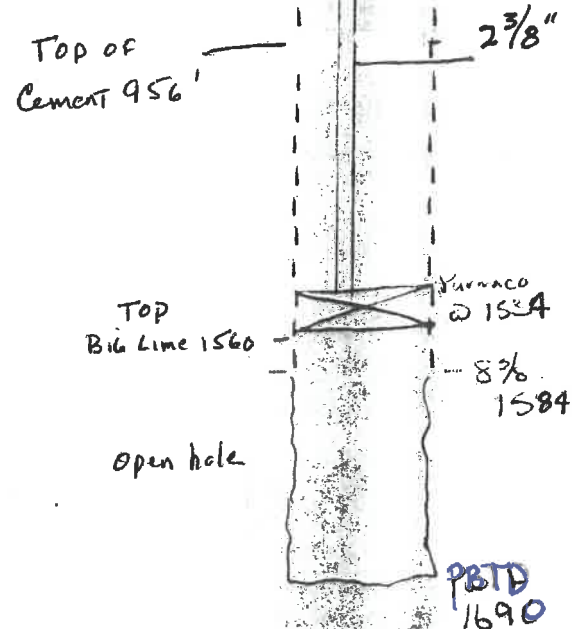


Parsons A-1

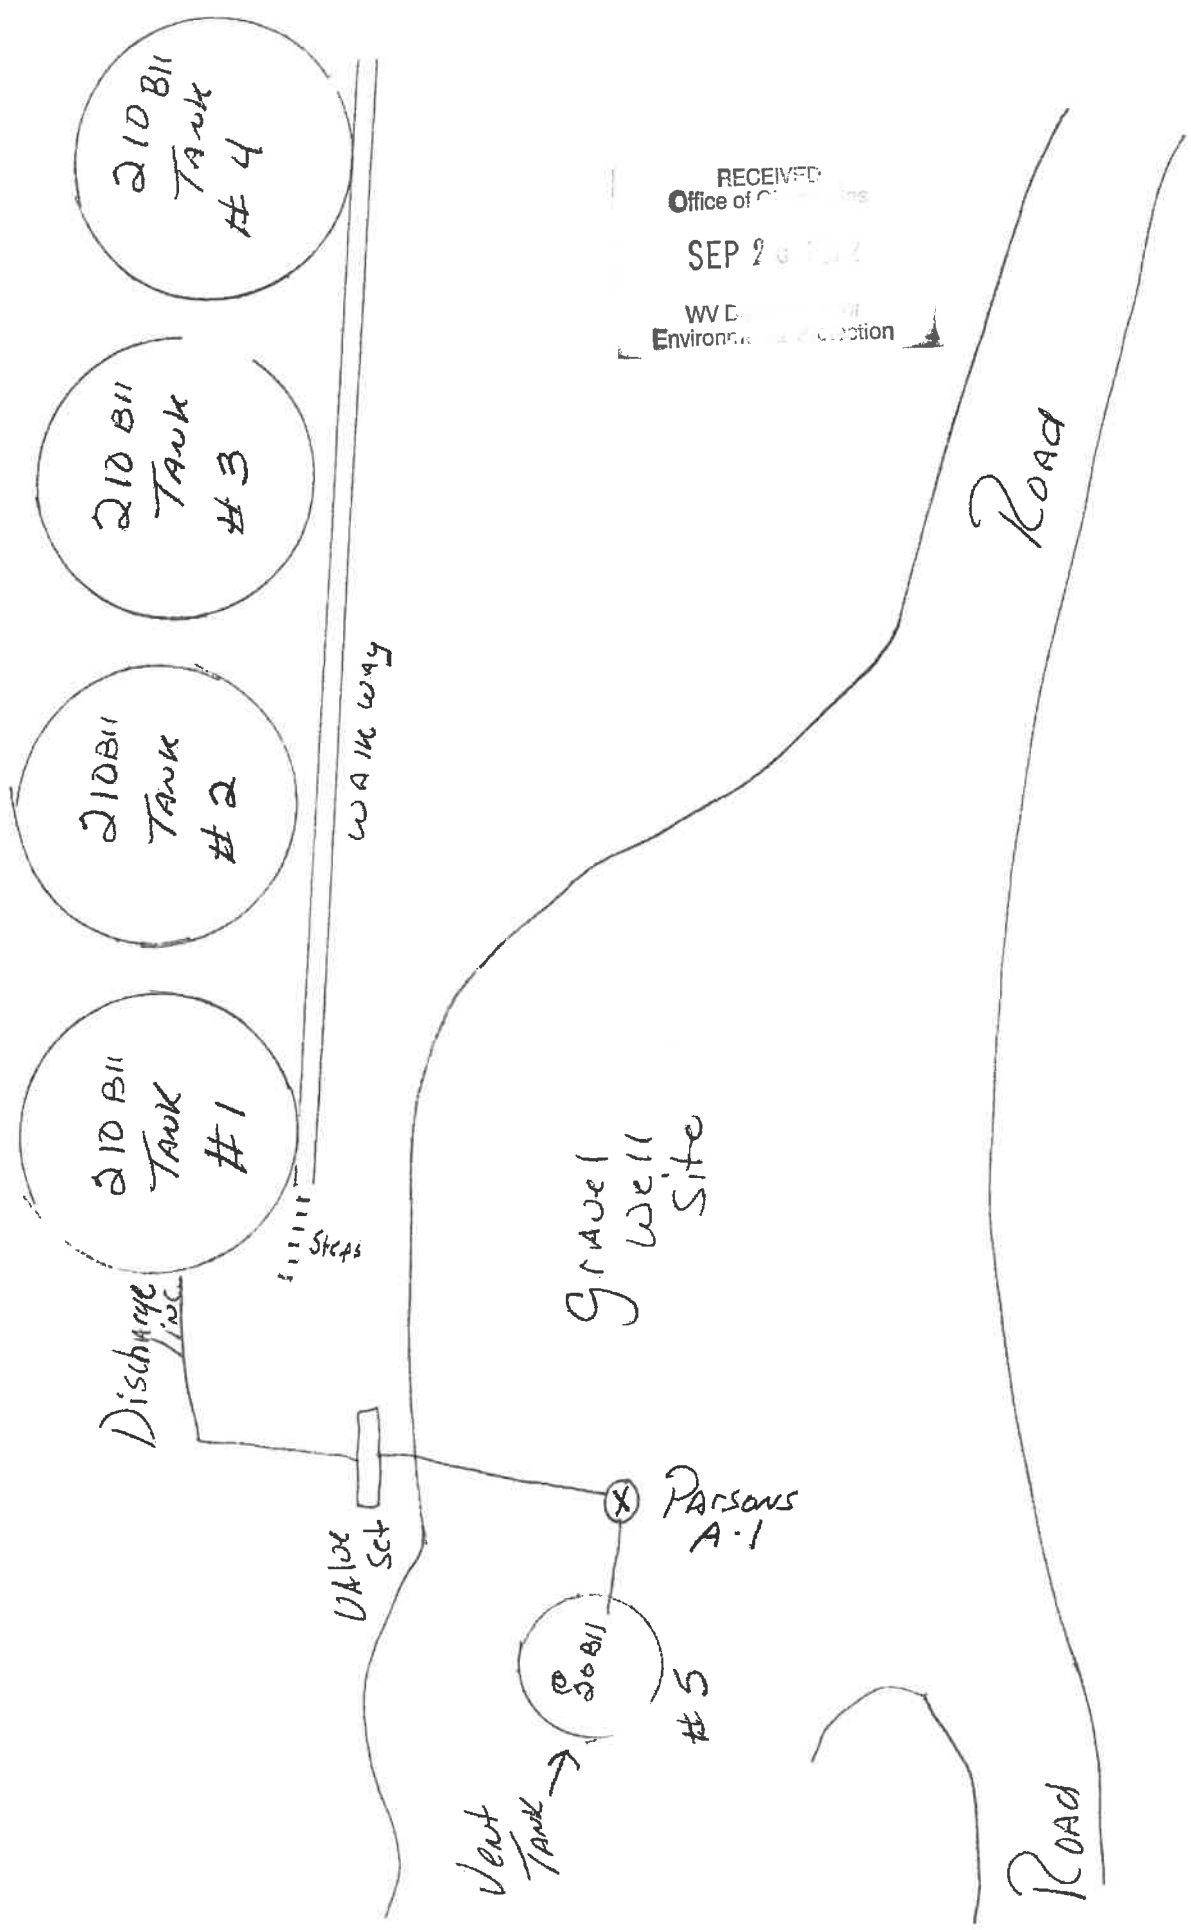

RECEIVED  
Office of Conservation  
SEP 28 1992  
W.D. [unclear]  
Environmental Protection

# Untitled Map

Write a description for your map.

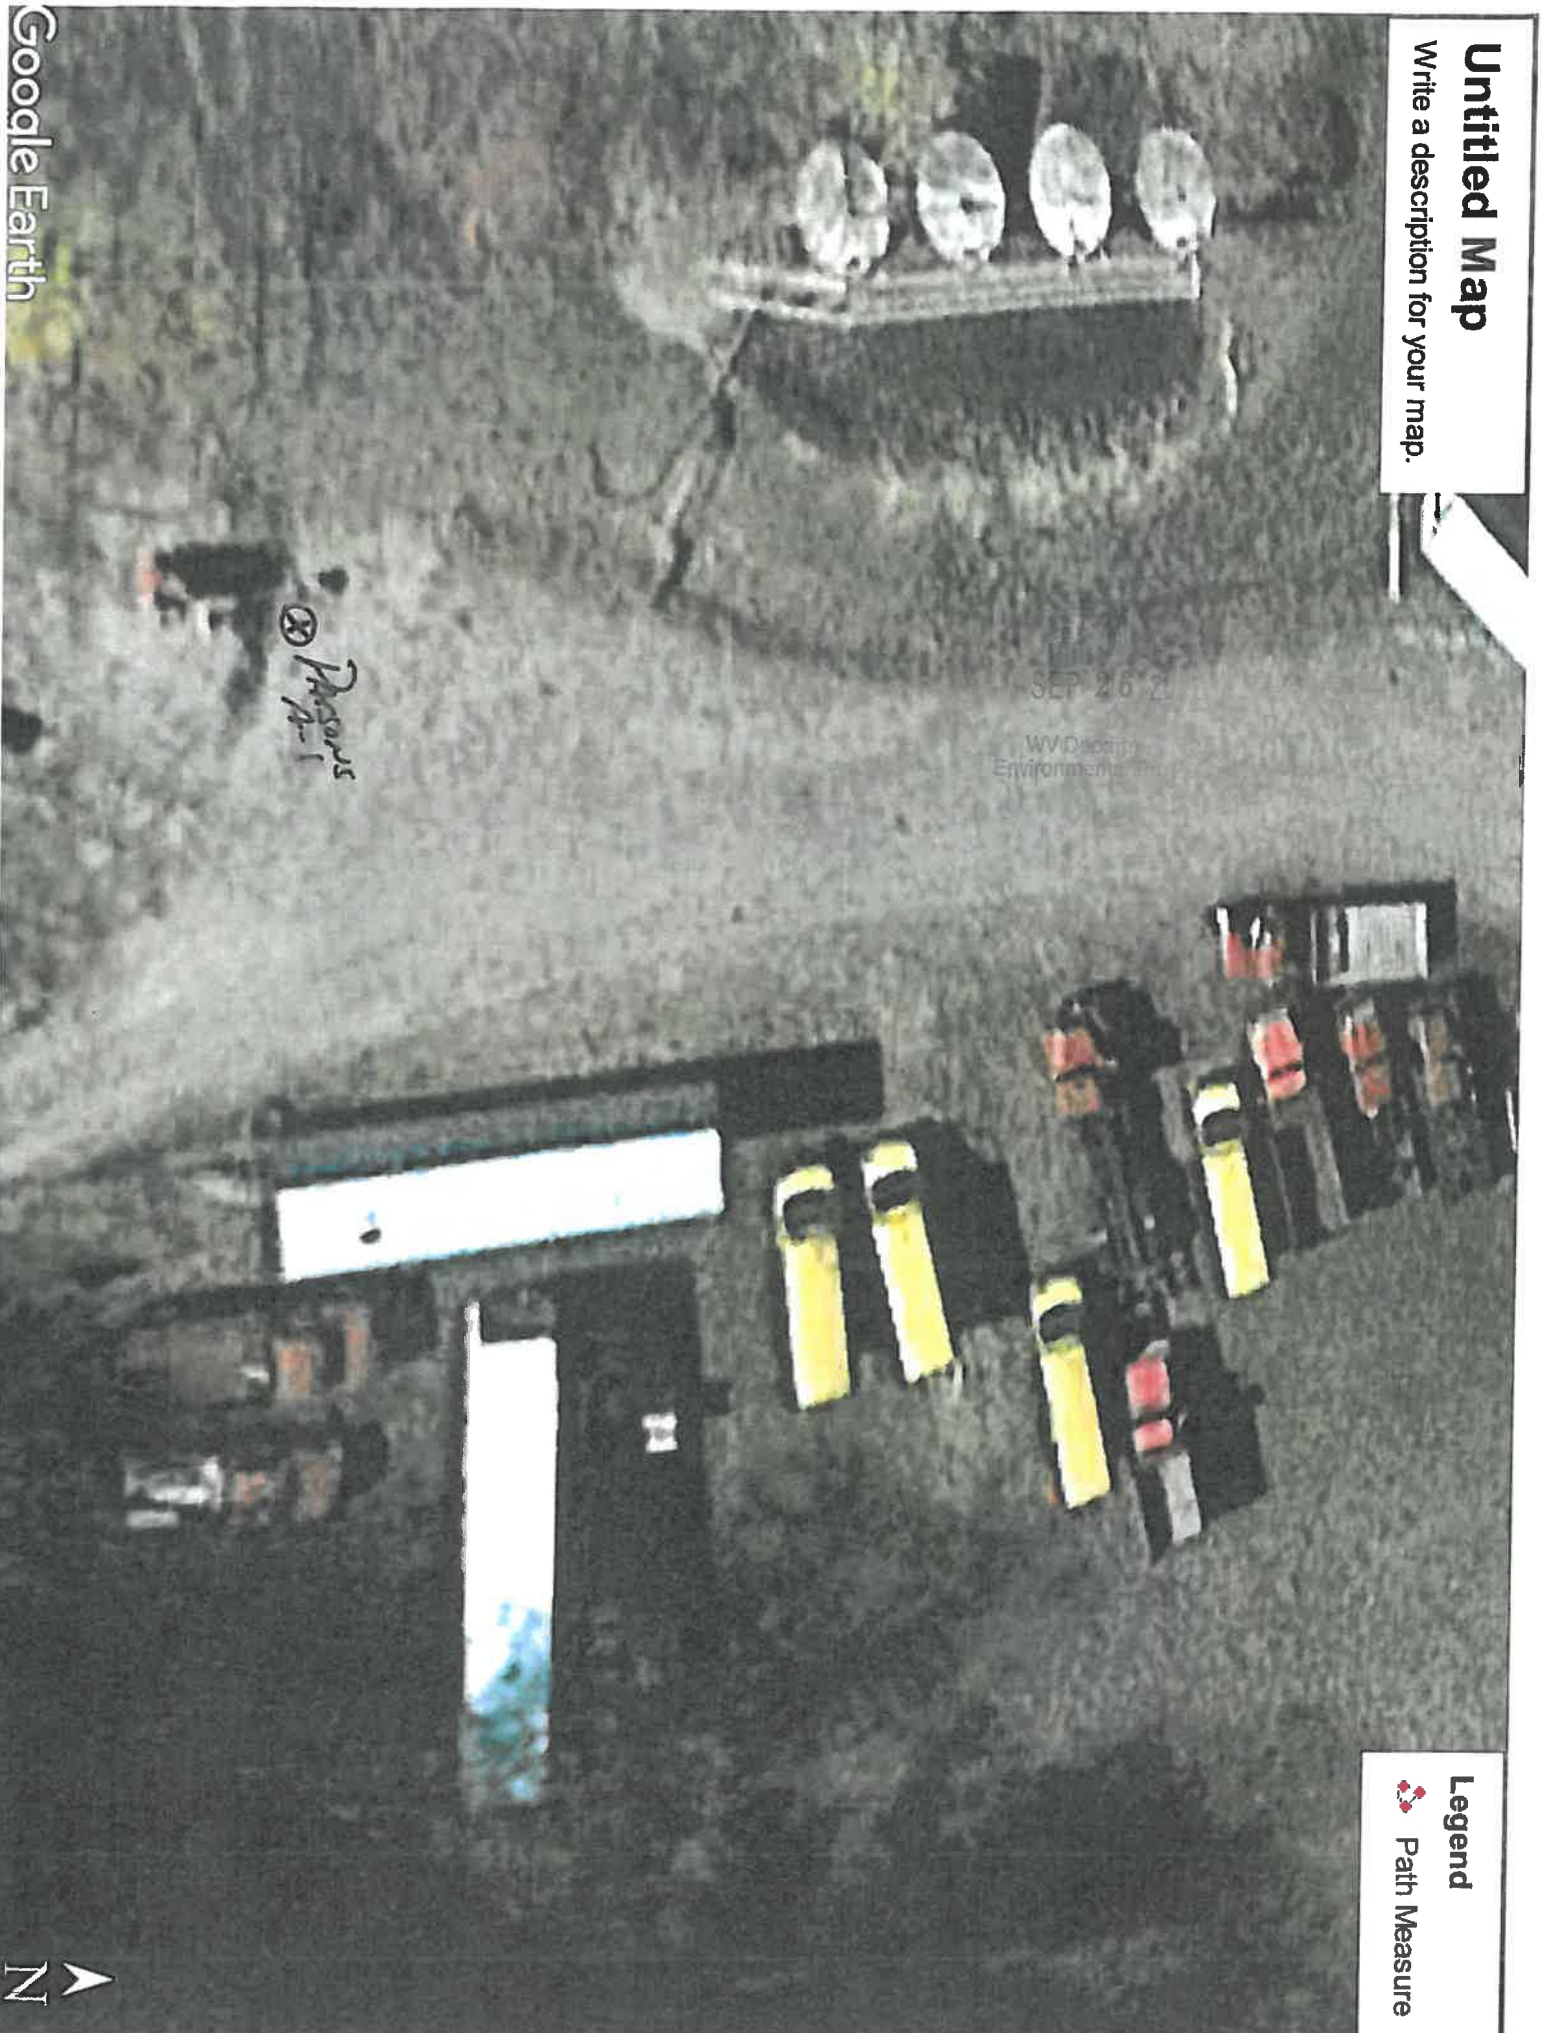

STATE OF WEST VIRGINIA  
DEPARTMENT OF MINES  
OIL AND GAS DIVISION

# WELL RECORD

Permit No. Kan-666

Oil or Gas Well GAS  
(Kind)

Company COLUMBIAN CARBON COMPANY  
Address Box 1240, Charleston, W. Va.  
Farm H. H. Parsons Acres 57  
Location (waters) Branch of Leatherwood  
Well No. A-1 (GW-430) Elev. 851.4 DF  
District Poca County Kanawha  
The surface of tract is owned in fee by H. H. Parsons  
et al (For addresses contact Columbian Carbon  
Company)  
Mineral rights are owned by " SAME "  
Address \_\_\_\_\_  
Drilling commenced 7-21-39  
Drilling completed 10-27-39  
Date shot 10-27-39 Depth of shot 5033-5086  
Open Flow /10ths Water in Inch \_\_\_\_\_  
/10ths More in Inch \_\_\_\_\_  
Volume 794M 794,000 Cu. Ft.  
Rock Pressure 1155 lbs. 3 Days hrs.  
Oil 1117; 1171 bbls. 1st 24 hrs.  
Fresh water 100' 3-13" Bailers per Hr. feet  
Salt water 1123' 3-10" " " " " feet  
1180' Hole Full Water

Casing and Tubing	Used in Drilling	Left in Well	Packers
Size			
16			Kind of Packer
14- 1 1/4"	43'	43'	No. Packer
10- 3/4"	406' 8"	Pulled	Size of
8- 5/8"	1584' 13"	1584' 13"	Depth set
6- 7/8"	1856' 13"	1856' 13"	
5- 7/8"	4934' 7"	4934' 7"	
3			Perf. top
2- 3/8"	5111' 0"	5111' 0"	Perf. bottom
Liners Used			Perf. top
3" 8.7#	91' 1"	91' 1"	Perf. bottom

CASING CEMENTED See Reverse Side SIZE See Reverse Side No. FT. See Reverse Side Date  
COAL WAS ENCOUNTERED AT See Reverse Side FEET See Reverse Side INCHES  
FEET See Reverse Side INCHES FEET See Reverse Side INCHES  
FEET See Reverse Side INCHES FEET See Reverse Side INCHES

Formation	Color	Hard or Soft	Top	Bottom	Oil Gas or Water	Depth Found	Remarks
Clay	White		0	53			
Sand			53	96	Water	90'	3-13" Bailers per Hr.
Red Rock			96	155			
Slate			155	175	Water	100'	6-13" do
Red Rock			175	190			
Black Lime			190	214			
Red Rock			214	310			
Sand			310	346			
Slate			346	380			
Lime			380	395			
Sand			395	440			
Slate			440	443			
Sand			443	455			
Slate			455	522			
Sand			522	638			
White Slate			638	665			
Black Slate			665	702			
Sand			702	773			
Brown Shale			773	835			
Sand			835	855			
Black Slate			855	1005			
Sand			1005	1048			
Brown Shale			1048	1086			
Salt Sand			1086	1484	Oil	1117	Show
Slate			1484	1488	Water	1123	3-10" Bailers Hr
Maxton Sand			1488	1560	Gas	1166	Show
Big Lime			1560	1704	Oil	1171	
Big Injun Sand			1704	1731	Water	1180	Hole Full
Slate			1731	1734	Gas	1585	Small Show
Lime Shell			1734	1740	Gas	1637	Show
Slate & Shells			1740	1831	Gas	1653-55	Show
Hard Lime Shells			1831	1843	Oil	1653-55	Show
Slate & Shells			1843	2125			
Brown Shale			2125	2135			
Berea Sand			2135	2137			
Lime			2137	2155			
Slate & Shells			2155	3355			
Brown Shale			3355	3390			
Slate & Shells			3390	3656			
Brown Shale			3656	3714			
Slate & Shells			3714	3798			

(Over)



PBTD  
1690'  
in 1948.

Formation	Color	Hard or Soft	Top	Bottom	Oil, Gas or Water	Depth Found	Remarks
Light Shale			3798	3860			
Brown Shale			3860	3948			
White Shale			3948	3980			
Slate & Shells			3980	4000			
White Shale			4000	4475			
Lime			4475	4478			
White Shale			4478	4505			
Dark Shale			4505	4525			
Brown Shale			4525	4772			
Lime Shell			4772	4776			
Brown Shale			4776	4795			
Black Shale			4795	4866			
Dark Brown Shale			4866	4897 SLM			
Corniferous Lime			4897 SLM	5018* SLM	PAY: 5034-36; 5051-54; 5080-86		
Oriskany			5018* SLM	5067*			
Sandy Lime			5067*	5083*			
Oriskany			5083*	5089*			
Lime			5089*	5092			
TOTAL DEPTH				5092			
* also per sample analyses							
CEMENT RECORD: 8/12/39 - Ran 79 Sacks Alpha Cement mixed with 1 Sack Aquagel. Ran 5 Sacks Aquagel ahead of cement - 4% mixture. Ran plug between Aquagel and cement. 10' spacer. 12' cement left in hole. Dallas Holley, Cementer - Halliburton Oil Well Cementing Company							
8-5/8"							
5-1/2" 10/2/39 - Ran 25 Sacks Alpha Cement Plug on top of cement - 10' spacer. Casing went back to bottom. 55' hard cement in pipe. Pat Patterson, Cementer Halliburton Oil Well Cementing Company							

Date November 20, 1939

APPROVED COLUMBIAN CARBON COMPANY, Owner

By O.W. Van Petten (Title) Sup't.



STATE OF WEST VIRGINIA  
DEPARTMENT OF MINES  
OIL AND GAS DIVISION

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE. ONE COPY MAILED TO THE DEPARTMENT, ONE COPY TO BE RETAINED BY THE WELL OPERATOR AND THE THIRD COPY (AND EXTRA COPIES IF REQUIRED) SHOULD BE MAILED TO EACH COAL OPERATOR AT THEIR RESPECTIVE ADDRESSES.

NAME COAL OPERATOR OR OWNER	<u>Columbian Carbon Company</u>	NAME OF WELL OPERATOR	<u>Box 873, Charleston 23, W. Va.</u>
ADDRESS		COMPLETE ADDRESS	
COAL OPERATOR OR OWNER	<u>April 22</u>	WELL AND LOCATION	<u>194 6</u>
ADDRESS	<u>Poca</u>	District	
LEASE OR PROPERTY OWNER	<u>Xanawha</u>	County	
ADDRESS		Well No.	<u>07-130</u>
	<u>E. B. Parsons 1-4</u>	Farm	
STATE INSPECTOR SUPERVISING PLUGGING	<u>O. N. Hall</u>		

AFFIDAVIT

STATE OF WEST VIRGINIA,

County of Xanawha

SS:

Ralph Snyder

and C. E. Kessel

being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Columbian Carbon Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 8th day of April, 194 6, and that the well was plugged and filled in the following manner:

SAND OR ZONE RECORD		FILLING MATERIAL		PLUGS USED		CASING	
FORMATION	CONTENT	FROM	TO	SIZE & KIND	COG PULLED	COG LEFT IN	
<u>Lime</u>	<u>Clay &amp; Rock</u>	<u>5089</u>	<u>5092</u>	<u>5 1/2" casing</u>	<u>4381'3"</u>	<u>550'4"</u>	
<u>Oriskany</u>	<u>Clay &amp; Rock</u>	<u>5083</u>	<u>5089</u>	<u>7" casing</u>	<u>1856'3"</u>	<u>---</u>	
<u>Sandy Lime</u>	<u>Clay &amp; Rock</u>	<u>5067</u>	<u>5083</u>	<u>2-3/8" tubing</u>	<u>5111'1"</u>	<u>---</u>	
<u>Oriskany</u>	<u>Clay &amp; Rock</u>	<u>5067</u>	<u>5018</u>	<u>3 1/2" Liner</u>	<u>91'1"</u>	<u>---</u>	
<u>Corniferous Lime</u>	<u>Cement</u>	<u>1693</u>	<u>5018</u>				
	<u>W.P. Plug</u>	<u>1693</u>	<u>1690</u>				
	<u>Aquagel</u>	<u>1697</u>	<u>4384</u>				
	<u>Aquagel</u>	<u>4384</u>	<u>1856</u>				
	<u>Aquagel</u>	<u>1856</u>	<u>1750</u>				
	<u>Stone, Clay, Cement</u>	<u>1750</u>	<u>1690</u>				
	<u>Acidized and producing</u>						
COAL SEAMS		DESCRIPTION OF MONUMENT					
(NAME)							
(NAME)							
(NAME)							
(NAME)							

and that the work of plugging and filling said well was completed on the 22nd day of April, 194 6.

And further deponents saith not.

Sworn to and subscribed before me this 28 day of May, 194 6.

My commission expires:

Nov. 7-1946  
JANETTY PRINTING COMPANY, CHARLESTON, W. VA.

Notary Public

Permit No. KAY-611-P

JRB

## Plug Back Description

On April 27, 1946, the well was plugged back to the Big Lime Horizon, a depth of sixteen hundred and ninety feet. The following procedure was used in plugging, the well back to 1690'.

Fill Solid	(5092'-5018')
Kill Oriskany Gas	
Cement	(5018-4993'-3 sacks)
MCF Plug	(4993'-4990')
5½" casing cemented	(4907'-4467')
Rip above 4467' and pull	
Pull 7" casing set at 1835'	
Fill hole with aquagel	(4990'-1750') - 17 sacks 4%
Bridge Solid - 1750-1700'	run on bridge to make
solid-mix red clay with bridging material.	The
productive intervals in the Big Lime were from 1585-	
1637' and 1553'-1665'. (See enclosed strip log and well	
record)	

RECEIVED  
Office of Oil and Gas  
OCT 13 2020  
WV Department of  
Environmental Protection

1-15-70

H. H. Parsons, et al A-1

851.4"

.8 Mi S.W. Blundon, W. Va. Br of Leatherwood Kanawha County,

10-27-39

5092'

1690'

Oriskany

5034'

(4-27-46) W. Va.

Big Lime

1560'

14" 42# 43  
8-5/8" 25.55# 1584'-3"  
5" 20# 550'

Strip logs

open

hose

2-3/8" tubing 5111' - Bottom joint perforated w/52-5/16"

drilled

hole

No Cool  
F. Water  
@ 90' f 100'

2" TUBING  
f Rods  
(Rods to be  
Removed)

Nitroglycerine - one shot

No. shells 1 - 3 1/2 x 6" 12 qt.; 2-3 1/2 x 10' water shell w/1 1/2" Gly  
core; 1-3 1/2 x 10' - 30' qt.;

1 - 3 1/2 x 12' water shell 1 1/2" gly core

Big Lime 4-27-46 47

12 1/2 bbls. of oil per day

Oriskany gas exhaust. Plug back to Big Lime

Acidize with 4200 gal. of inhibited hydrochloric and produced  
oil and gas

1/17/71 0 and 0 oil per day

2-3/8"

4#

1678'

5/8"x25

new

1650'


8 5/8"  
1584'


WORK BARREL  
To Be Removed

1560' Casing  
To Be Removed

P.B.T.D. 1690'



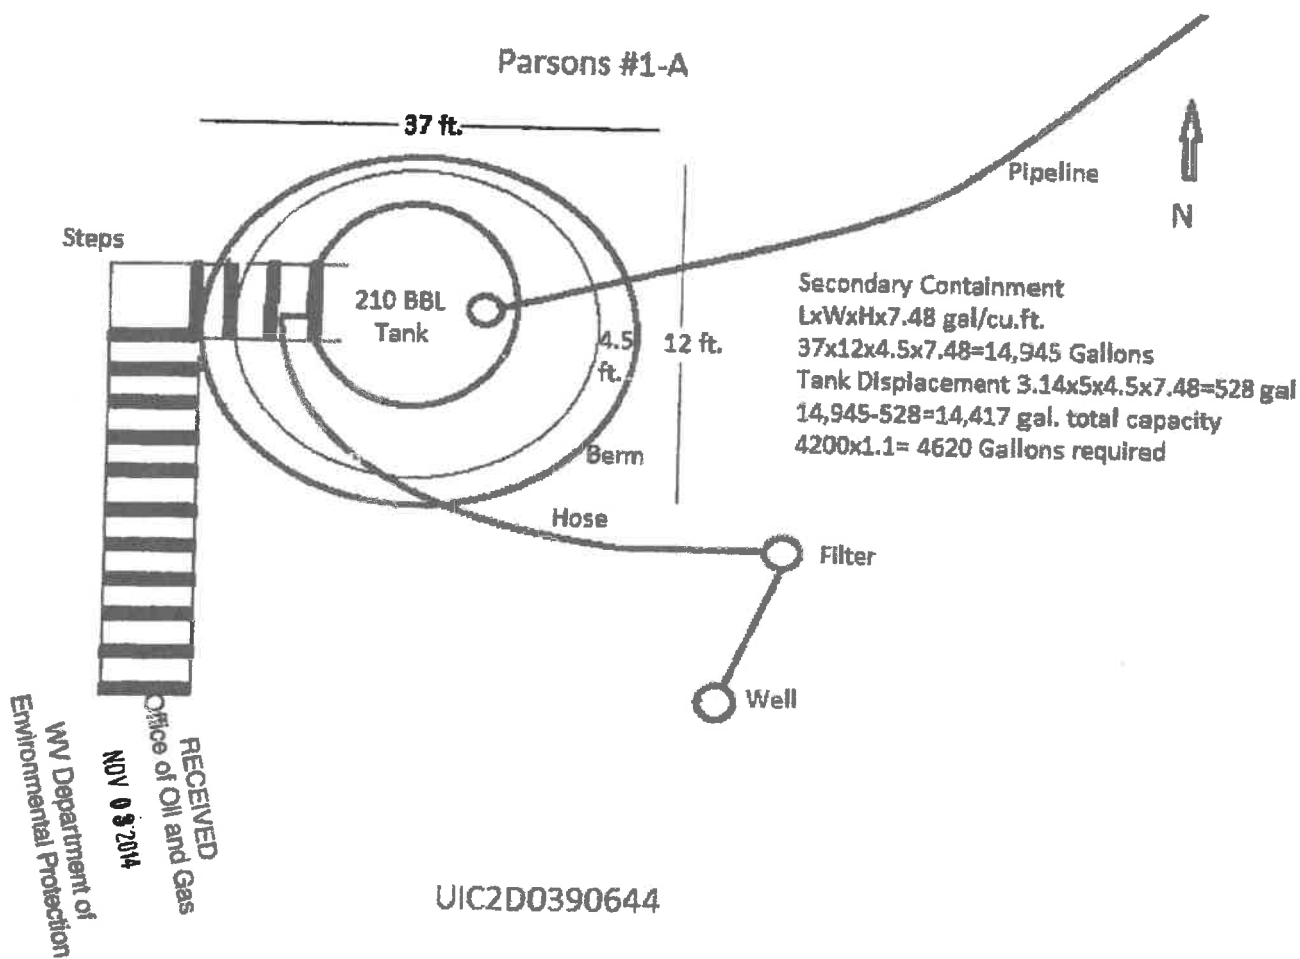

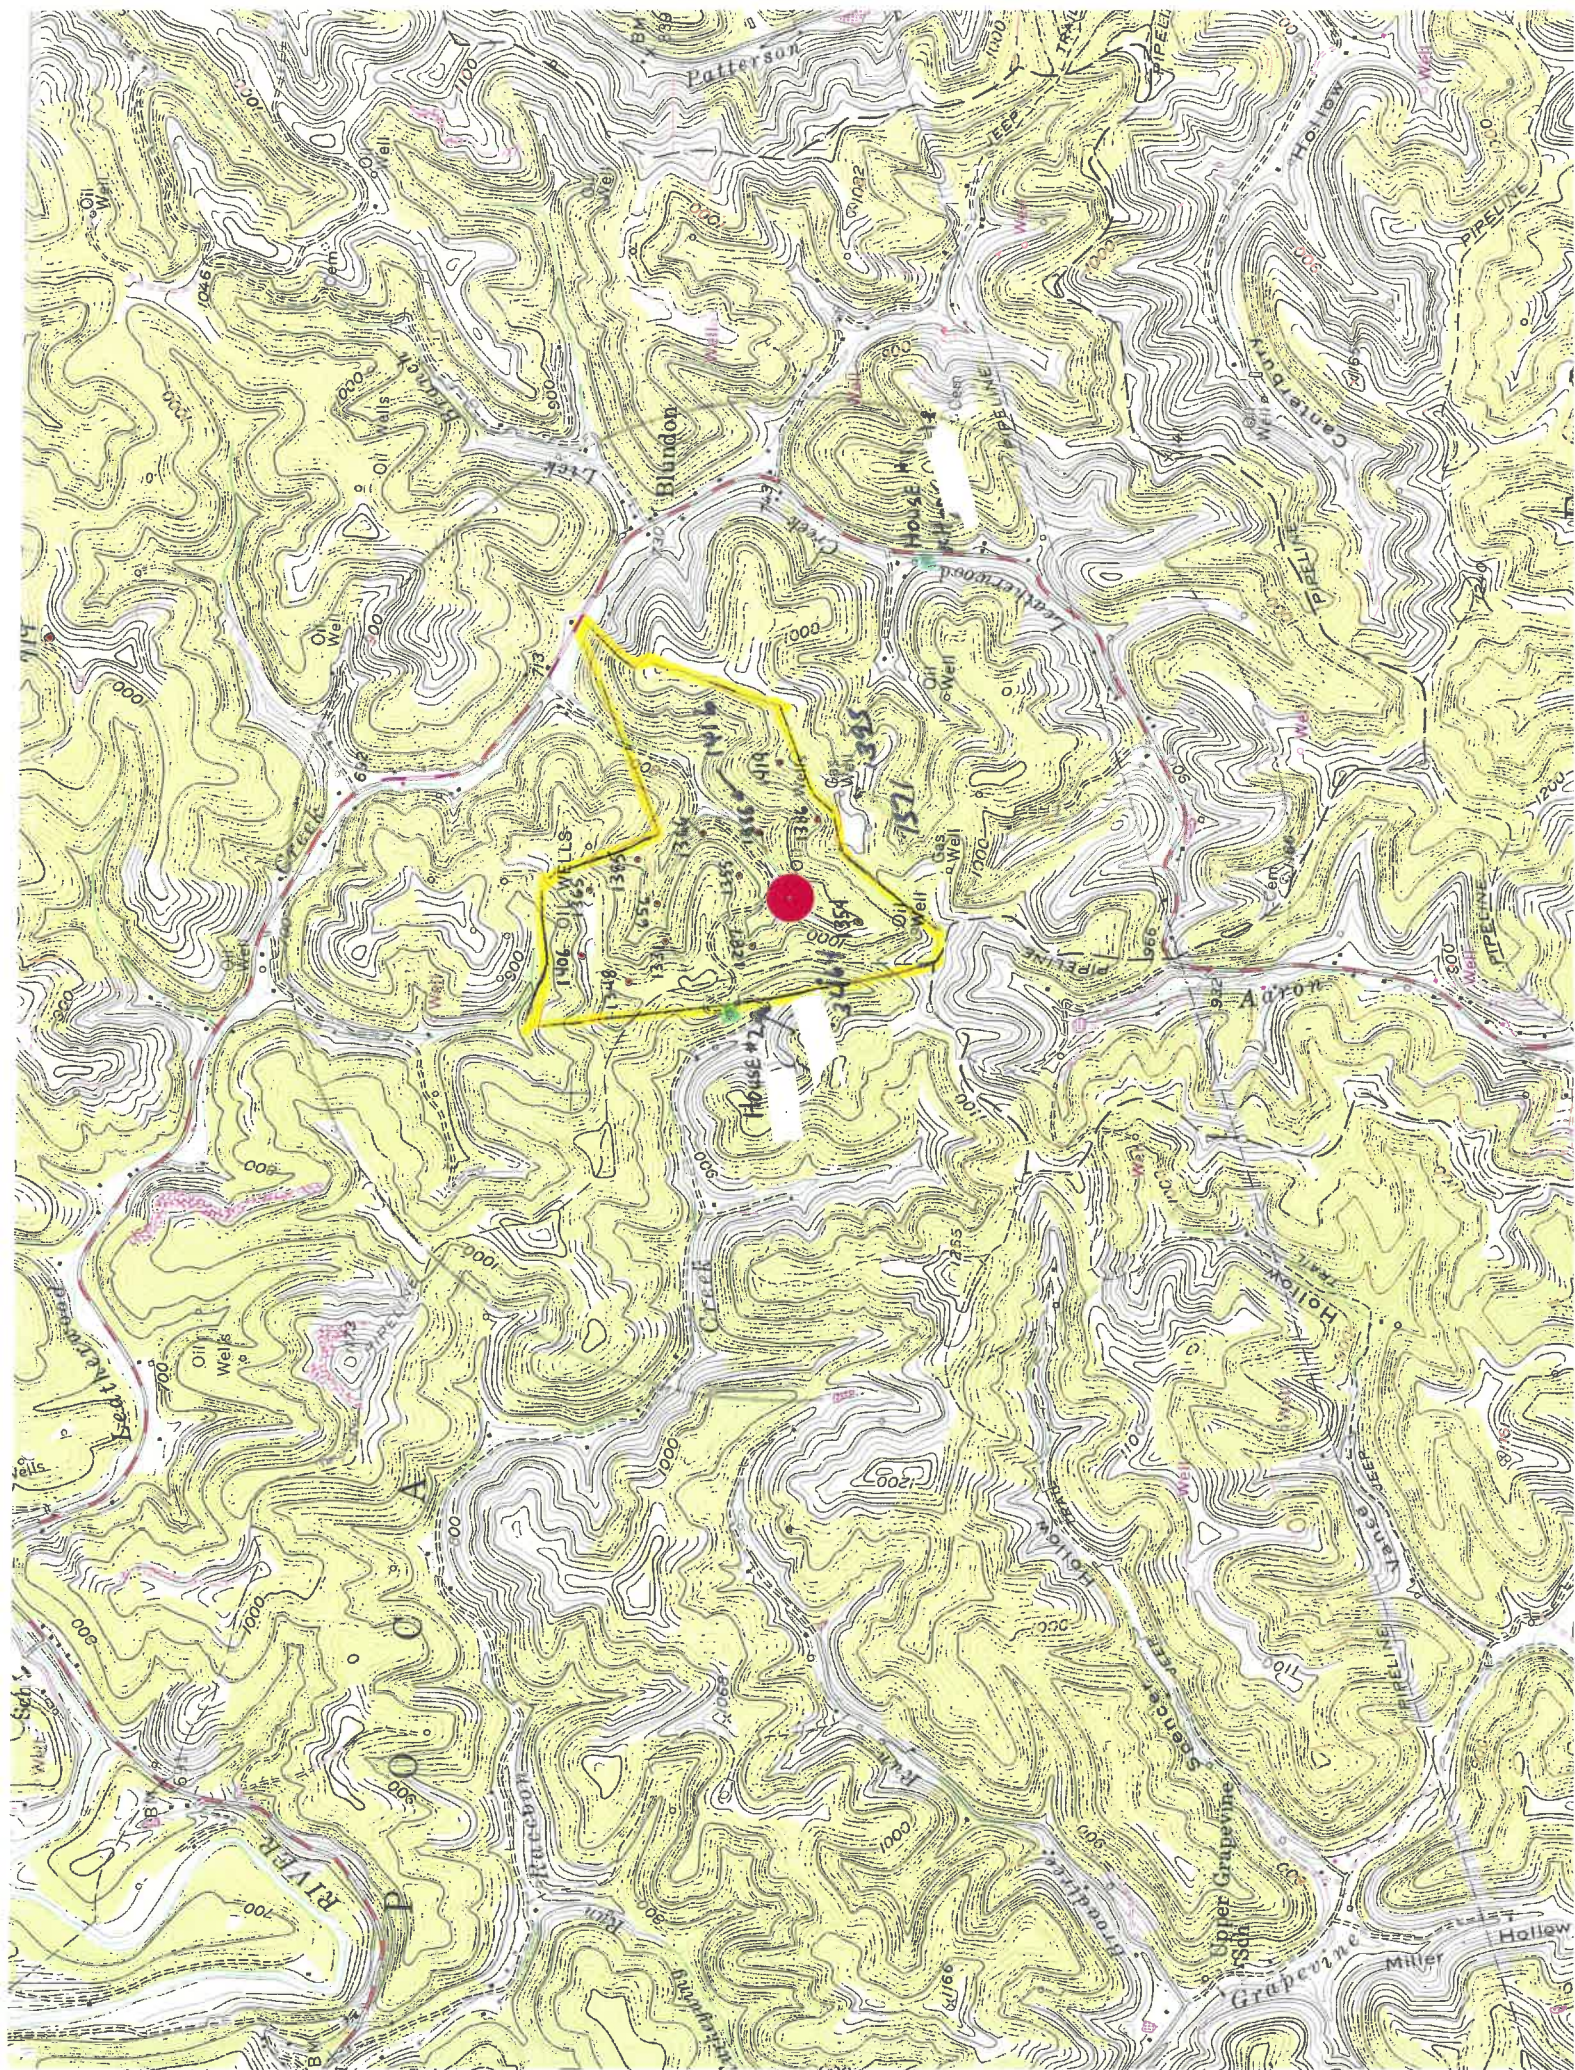

## APPENDIX G


### Wells Serviced by Injection Wells

[illegible]

**Make as many copies as necessary and include page numbers as appropriate.**

# PARSONS #1 INJECTION WELL

Base Petroleum  
API: 47-039-0644  
UIC Permit 2D03900644  
Revised 10/1/2020

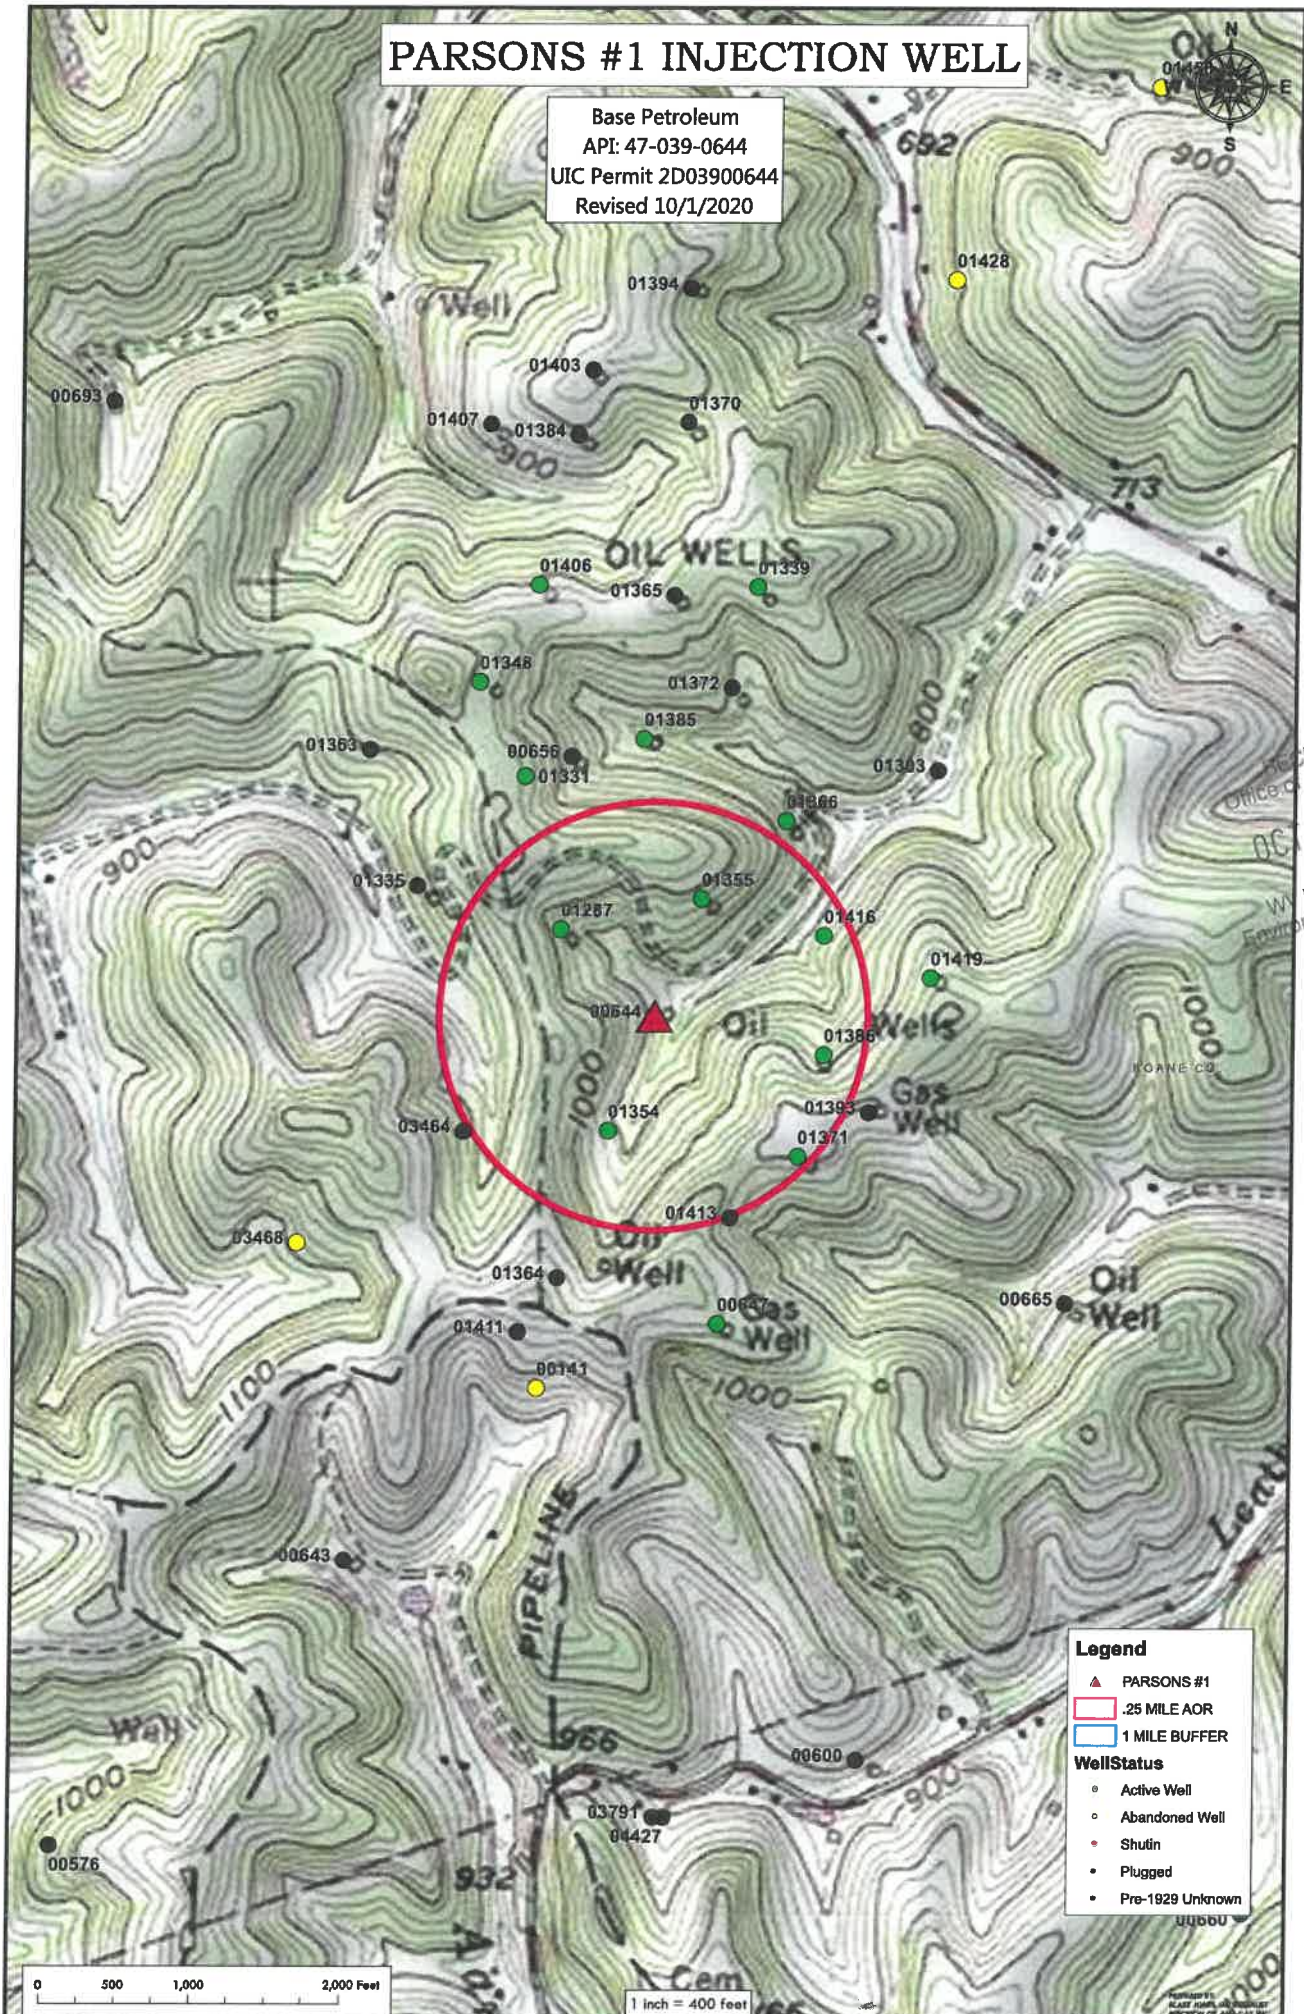

RECEIVED  
Office of Oil and Gas  
OCT 13 2020  
WV Department of Environmental Protection

0 500 1,000 2,000 Feet

1 inch = 400 feet

## APPENDIX H

### GROUNDWATER PROTECTION PLAN

Facility Name: BASE PETROLEUM PARSONS #1A

County: KANAWHA

Facility Location:

Postal Service Address:			
Latitude :	37.535493	Longitude:	-81.534326

Contact Information:

Person:	JOHN WILCOX
Phone Number:	304-756-2827
E-mail Address:	jhnwilcox@aol.com

Date: 10/1/2020

1. A list of all operations that may contaminate the groundwater.

There is one transfer point where tanker trucks operated by Kermlt Tyree Contracting are able to dump produced fluids from various wells as indicated in Appendix G into a single 210 bbl. storage tank.

2. A description of procedures and facilities used to protect groundwater quality from the list of potential contaminant sources above.

Tanker trucks are backed onto the site to the transfer point which is located directly above the tank battery and the secondary containment. The transfer point has a plastic tub lined with absorbent pads to collect any drippings from the transfer. Any line breaks in the transfer would be contained in the secondary containment.

3. List procedures to be used when designing and adding new equipment or operations.

No new equipment or operations are anticipated for this facility at this time.

RECEIVED  
Office of Oil and Gas  
**OCT 13 2020**  
WV Department of  
Environmental Protection

4. Summarize all activities at your facility that are already regulated for groundwater protection.

UIC regulations are applicable to the disposal well and oil and gas laws and regulations are applicable to all associated operations.

RECEIVED  
Office of Oil and Gas  
OCT 13 2020  
WV Department of  
Environmental Protection

5. Discuss any existing groundwater quality data for your facility or an adjacent property.

Little information exists for the general area due to the lack of water supply wells. Historical information and limited water samples from the area indicate fair water quality due to typical higher iron concentrations that exist throughout many areas of the state.

6. Provide a statement that no waste material will be used for deicing or fill material on the property unless allowed by another rule.

No waste material will be used for deicing or fill material on the property

7. Describe the groundwater protection instruction and training to be provided to the employees. Job procedures shall provide direction on how to prevent groundwater contamination.

Kermit Tyree Contracting currently operates this well for Base Petroleum Inc. and will provide employees instruction and training in this recognition and prevention of groundwater contamination and the potential sources of contamination on a quarterly basis. Employees will be trained on proper procedures for filling tanker trucks at the producing well locations in order to eliminate contamination at other sites as well as transportation of those fluids. Once the tanker truck enters the disposal facility, employees will be given instruction as to the proper procedures for connecting to the transfer station and pumping of the fluids into the storage tanks. Employees will be instructed on measures to be taken in the event of a spill. All spills will be reported to the WVDEP or appropriate authority immediately after clean-up.

8. Include provisions for inspections of all GPP elements and equipment. Inspections must be made quarterly at a minimum.

While the injection well is in operation, inspections are made on a daily basis. These inspections include, but are not limited to visual inspection of all equipment, pipelines, storage tanks, and overall operations. The injection well is subject to MIT every five years.

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

RECEIVED  
Office of Oil and Gas  
OCT 13 2020  
WV Department of  
Environmental Protection

6/2002

## APPENDIX I

### Requirement for Financial Responsibility to Plug/Abandon an Injection Well

RECEIVED  
Office of Oil and Gas  
JUN 10 2022  
WV Department of  
Environmental Protection

In accordance with Legislative Rule 47 CSR 13-13.7.g, all UIC permits shall require the permittee to maintain financial responsibility and resources to close, plug, and abandon underground injection wells in a manner prescribed by the Chief. The permittee must show evidence of financial responsibility to the Chief by submission of a surety bond, or other adequate assurance, such as a financial statement or other material acceptable to the Chief. This certification must be signed by one of the following:

1. a principle corporate officer of at least the level of vice-president for a corporation,
2. a general partner for a partnership,
3. the proprietor or owner of a sole proprietorship,
4. a principal executive or ranking elected official for a public agency,
5. a duly authorized representative in accordance with Legislative Rule 47 CSR 13-13.11.b (A person may be duly authorized by one of the primary entities (1-4) listed above by submitting a written authorization to the Chief of the WVDEP Office of Oil and Gas designating an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of plant manager, operator of a well or a well field, superintendent, or position of equivalent responsibility. A duly authorized representative may thus be either a named individual or any individual occupying a named position.)

Base Petroleum

Company Name

2D03900644

UIC Permit Number


I certify in accordance with Legislative Rule 47 CSR 13-13.7.g, the company/permit holder cited above will maintain financial responsibility and resources to close, plug, and abandon underground injection wells(s) in a manner prescribed by the Chief of the Office of Oil and Gas and that documents to support this requirement are on record with the same.

John Wilcox

Print Name

Agent

Print Title

  
Signature

6/10/22  
Date

**47-039-00644 Parsons # A-1**

**Plugging Procedure**

RECEIVED  
Office of Oil and Gas

SEP 26 2022

WV Department of  
Environmental Protection

Rig up the rig

Pull 1,590' of 2 3/8" tubing, remove the packer

Run 2 3/8" tubing in the hole to @1,675'

Gel the hole

Cement from 1,675' to 1,550'

Pull the 2 3/8" tubing from the hole

Free point and cut the 8 5/8" casing @900'

Pull the 8 5/8" casing from the hole

Run 2 3/8" tubing in the hole to 900'

Cement from 900' to 800'

Cement from 500' to 400'

Cement from 100' to surface

Erect a monument with the API number attached

**UKC # \_\_\_\_\_**

[illegible]

**Page numbers should be maintained sequentially to provide an adequate record.**

## **RIGHT OF APPEAL**

Notice is hereby given of your right to appeal the terms and conditions of this permit of which you are aggrieved to the Environmental Quality Board by filing a NOTICE OF APPEAL, on the form prescribed by such Board for this purpose, in accordance with the provisions of Section 21, Article 11, Chapter 22 of the Code of West Virginia within thirty (30) days after the date of receipt of this permit.

## Underground Injection Control Permit

### CERTIFICATION DOCUMENT

#### West Virginia Department of Environmental Protection Office of Oil and Gas

Permit Id: **2D03900644002**

Permit Name: **-  
Base Petroleum, Inc.**

In accordance with Part II, Reporting and Notification Requirements, I hereby certify that I have read and am personally familiar with all the terms and conditions of this permit.

I understand that the underground injection of any waste streams other than those provided for in this permit is strictly prohibited. I understand that failure to pay the Annual Permit Fee or any other associated fees required by West Virginia Code, Chapter 22, Articles 11 and 12 shall be cause for revocation of this Permit. I further understand that reporting is required, and noncompliance with the terms of this permit will be cause for revocation of the permit and subject me to significant penalties including the possibility of fines and imprisonment.

---

Signature

---

Name and Title (Type or Print)

---

Date